MULTI-FUNCTION JUMP STARTER

USER MANUAL

⚠ DANGER

Please read the user manual carefully before using this product, otherwise the following consequences may occur: electric shock, explosion, fire, resulting in personal injury or property loss.

Get an electric Shock. The product is an electrical device that shocks and causes serious injury. Don't cut the power cords. Don't get immersed in water or wet.

A. Functional diagram

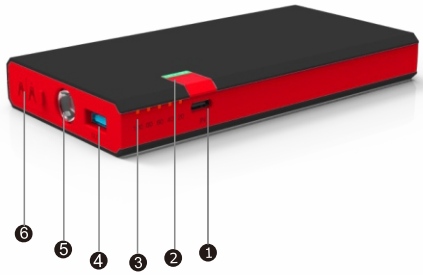

1.TYPE-C Charging port
2.Function Key
3.Indicator light
4.USB output port
5.Emergency Lights
6.Start Port

B. Technical parameters

Model : A13	Suitable for car type:12V battery Car
Size: 150*75*20mm	Starting curent: 400A
Input: 5V⎓2A /9V⎓2A	Peak current: 1000A
USB Port: 5V⎓2A	Applicable temperature : -30~65℃

C.Car started steps (Please clean the battery positive and negative poles of dirt first!)

Normal steps:

1 Insert jumper cables into the jumping port, the indicator light will flash red and green alternately.



2 Connect red clamp to "+" end and black clamp to"-" end of car battery, the indicator light will turn green.(if do not turn green ,please follow the Mandatory start Step.)



3 Starter the car



4 Remove black clamp
Remove red clamp

5 Pack away

Mandatory start step:



Remove black clamp

Please press "RST" button with needles until turn it green.

Connect red clamp to "+"end and black clamp to"-"end of car battery (Don't reverse!)



Starter the car (If it fails, go back to step 1)



Remove black clamp
Remove red clamp

Pack away

D.Function key instructions



E.Description of Indicator lights

Press the function key to check the capacity of jump starter

Indicator lights	1Flashing	1 solid	2 solid	3 solid	4 solid	5solid
Battery capacity	0%	20%	40%	60%	80%	100%

When charging, indicator lights will flash one by one.
The number of solid indicator lights indicates the battery capacity of jump stater.Full indicator lights are solid when charging is pause or completr

F. Description of charge and discharge

This product has built-in boost voltage, supports 5V⎓2A/9V⎓2A charging input, and supports 5V⎓2A output. When charging, be sure to use a regular charger that matches its parameters. Do not use inferior charger to charge, otherwise safety accidents may occur. Please do not connect the over power products when outputting USB.

G.Toxic and Harmful Substances

ITEM	composftion and amount of toxic and harmful substances									
	Pb	Hg	Cd	Cr(VI)	PBB	PBDE	DEHP	DBP	BBP	DIBP
Main Unit	O	O	O	O	O	O	O	O	O	O

O:indicates all homogeneous materials' hazardous substance content are below the MCV limit specified in the standard (EU)2015/863.

H. Warning

1. The emergency starting operation steps of the car cannot be reversed.
2. In case of failure, please contact the dealer for handling. It is forbidden to disassemble the main machine without authorization; otherwise safety accidents may be caused.
3. The positive and negative poles of the power supply are prohibited from butt joint, reverse connection or indirect short circuit; otherwise safety accidents will be caused.
4. When using or charging, please stop using and consult customer service if any abnormal situation is found.
5. Please keep away from high temperature or humid environment, and do not place it in direct sunlight.
6. Children are prohibited from contacting this product to avoid safety accidents.
7. When charging the product, please put it in an empty place and have an adult look after it.
8. Please be sure to read the instructions and follow them. If you have any questions, please contact customer service at any time.
9. It is strictly prohibited to disassemble, puncture, refit, short-circuit the product or put it into water, fire or expose it to an environment with a temperature higher than 65℃ to avoid damage to the product or other hazards.
10. Do not clamp battery clamps or connect the positive and negative electrodes directly or indirectly with conductors to avoid safety accidents.

I. Maintenance tips

1. This product can effectively deal with the car start-up failure caused by sporadic problems of car battery such as insufficient electricity and low temperature. However, it can only be used as emergency equipment and cannot replace the frequent use of car batteries or professional rescue. If the battery is aged, please replace the new battery in time after starting the car. After the car starts, please replenish the electricity in time for the next use.
2. Do not start the car at less than 60% of the power, otherwise it will easily lead to over discharge of the battery and damage to the battery core.
3. The best way to maintain the emergency starting power supply for automobiles is to use it lightly and charge it quickly. The greater the frequency and number of times it is used, the faster the battery will lose.The smaller the degree of deep discharge of the starting power supply, the longer the use time. If possible, avoid frequent full charge and discharge.
4. The startup port is the direct output port of the battery. It is not protected nd must not be directly connected to products without voltage protection. Otherwise, the products and power supply may be damage
5. When not in use for a long period of time (more than 15 days), the battery has self-consumption, which requires regular check to maintain a certain amount of electricity and charge and discharge at least once a month. Otherwise, the power supply may be damaged.

J. Warranty statement

1. Within 7 days from the next day when you sign for the product, if the product has any quality problem caused by non-human reasons, you can enjoy the service of return and replacement without reason after being confirmed by the manufacturer.
2. Within 8-15 days from the next day when you sign for the product, if the product has any quality problem caused by non-human factors, you can enjoy free replacement or maintenance service upon confirmation by the manufacturer.
3. Within 12 months from the day after you sign for the product (within 3 months for accessories), if there is any product quality problem caused by non-human factors, you can enjoy free maintenance service upon confirmation by the manufacturer.

Non-warranty Regulations

1. Unauthorized maintenance, misuse, collision, negligence, abuse, excessive discharge,liquid intake, accident, alteration, incorrect use of non-product accessories or accessories that do not conform to parameters, or tearing up, altering labels and production dates.
2. The validity period of three guarantees has expired
3. Damage caused by force majeure.
4. Performance failure of this product and accessories caused by human factors.
5. Do not operate or maintain according to instructions.
6. Normal battery loss and performance degradation caused by power supply usage.

Warranty Card

For warranty service, please show this warranty card and fill in the relevant contents in detail. The manufacturer provides warranty service to the purchasing customer for 12 months from the next day when the product is received, and 3 months for accessories. For products that are not covered by the warranty, our company can provide maintenance services, but the maintenance expenses and round-trip freight shall be borne by the customer.
Note: This product is for commercial use and only provides one-month warranty service.

Item NO.		Serial NO.	
DATE OF Purchased		DATE OF Repair	
Name		Tel.	
Adress			
Purchasde From			
Description defects			